

Super bright 1080p projection

EH465



Wireless presentation and multimedia



- Extraordinarily bright 1080p projection with 4,800 lumens and 20,000:1 contrast ratio
- Extensive I/O connectivity with HDMI, VGA, audio, RJ45, USB and RS-232C
- PC-free USB image viewer and office document reader
- Wireless presentations and images with HDCast Pro (USB Wi-Fi adapter included)
- 1.5x zoom & 4 corner correction for robust installations in any environment
- USB display screen mirroring with iOS and Android devices
- LAN display via Ethernet with Windows and Mac OS X



The bright 4,800 lumen 1080p Optoma EH465 is the ultimate projector for classrooms, boardrooms and multi-purpose offices. Its 20,000:1 contrast ratio, sRGB and REC.709 color profile support produce luminous images with accurate colors visible practically any time of day.

A PC-free image viewer and document reader displays office documents, PDFs and images from USB storage devices. HDCast Pro connectivity provides wireless screen mirroring with Android, Mac OS and Windows devices.

LAN display supports up to 4 simultaneous computers while USB display mirrors Android and iOS devices. A 1.5x zoom and four corner geometry correction allows flexible installations while robust input options include HDMI, VGA and RJ-45 for connectivity to a wide range of devices.

CONNECTIVITY (May require optional accessories)



Computers



Smart Phones



Tablets



3D Blu-ray/DVD Players



Camcorders



Apple TV®



Chromecast™

SUPER BRIGHT 1080P PROJECTION— EH465

OPTICAL/TECHNICAL SPECIFICATIONS

Display Technology	Single 0.65" DMD S600, DC3 chip DLP® Technology by Texas Instruments
Color Wheel	RYGBW
Native Resolution	1080p (1920x1080)
Maximum Resolution	WUXGA (1920x1200)
Brightness	4,800 ANSI lumens
Contrast Ratio	20,000:1
Displayable Colors	1.07 billion
Lamp Life and Type*	4500/3500/2500 (EDU/ECO/Bright) - 285W
Projection Method	Front, rear, ceiling mount, table top
Keystone Correction	± 30° vertical / ± 25° horizontal
Keystone Distortion	±0.5% max
Geometry Correction	4 corner correction with individual point adjustment
Uniformity	75%
Offset	114.9%±5%
Aspect Ratio	16:9 (native), 16:10, 4:3 and LBX compatible
Throw Ratio	1.39 - 2.09
Projection Distance	3.93' - 49.1' (no zoom)
Image Size	25.9" - 324.9"
Projection Lens	F=2.42 ~2.97, f=20.70 ~ 31.05mm manual
Optical Zoom	1.5x
Digital Zoom	0.8 - 2.0
Audio	10W
Noise Level	31dB/37dB (ECO/Bright)
Remote Control	Full size remote
Operating Temperature	41–104°F (5–40°C), 85% max humidity
Power Supply	AC input 100–240V, 50–60Hz, auto-switching
Power Consumption	370W typical (Bright mode), 390W max (Bright mode), 300W typical (Eco+ mode), 320W max (Eco+ mode)
High Altitude	Operating temp @ sea level up to 10000 feet = 23F (max); must manually switch to high altitude mode @ 5000 feet & above (using OSD)

MULTIMEDIA AND PRESENTATION FEATURES

Wireless Screen Mirroring	Windows, Mac and Android devices (requires HD Cast Pro app)
LAN Display (Ethernet)	Screen mirroring with Windows and Mac systems, up to 4 simultaneous users (requires HD Cast Pro app)
USB Display	Screen mirror with Android and iOS devices over USB cable (requires HD Cast Pro app)
PC-free Image Viewer and Document Viewer	Supports viewing of office documents (Word, Excel & Powerpoint [animations not supported]), PDFs and images via USB storage devices
PC-free Image Format Support	JPEG

COMPATIBILITY SPECIFICATIONS


Computer Compatibility	FHD, HD, WXGA, UXGA, SXGA, XGA, SVGA, VGA, Mac
Video Input Compatibility	PAL (B, D, G, H, I, M, N, 576i/p), NTSC (M, 4.43/3.58 MHz, 480i/p), SECAM (B, D, G, K, K1, L) HD (1080i, 720p)
3D Compatibility†	Side-by-side: 1080i50 / 60, 720p50 / 60 Frame-pack: 1080p24, 720p50 / 60 Over-under: 1080p24, 720p50 / 60
Vertical Scan Rate	15 - 91kHz
Horizontal Scan Rate	25 - 85Hz (120Hz for 3D)
User Controls	Complete on-screen menu adjustment in 26 languages
I/O Connection Ports	2xHDMI (with MHL), VGA-in, VGA-out, audio-in (3.5mm), audio-out (3.5mm), RJ-45, 1x USB (Wi-Fi adapter), 1x USB (USB reader and USB power), USB-B Mini (service), 12V trigger (3.5mm), RS-232C
Loop Through (Audio)	Yes

*Light source life is dependent upon many factors, including brightness mode, display mode, usage, environmental conditions and more. Light source brightness can decrease over time.

†3D content can be viewed with DLP Link active shutter 3D glasses when projector is used with a compatible 3D player. Please visit www.OptomaUSA.com for more information.



- | | | |
|-------------------|----------------------|------------------------|
| 1. HDMI1-In | 6. RJ-45 | 11. Audio-Out |
| 2. HDMI2-In (MHL) | 7. 12V-Out | 12. USB Reader/Display |
| 3. RS-232C | 8. USB Wi-Fi Adapter | 13. AC Power |
| 4. VGA-In/YPbPr | 9. Mouse service | 14. Kensington™ Lock |
| 5. Audio-In | 10. VGA-Out/YPbPr | |

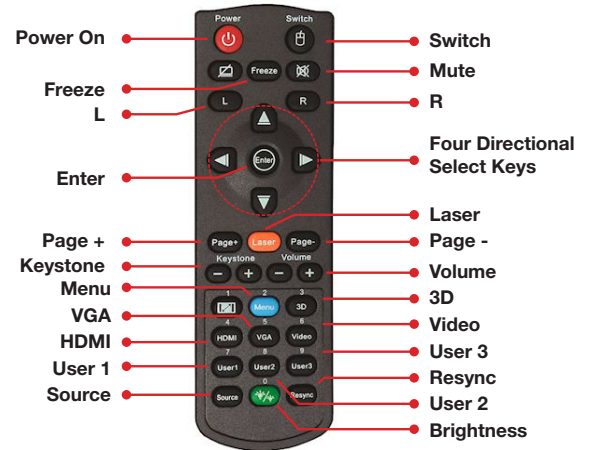

PHYSICAL SPECIFICATIONS

Security	Security bar, Kensington lock, password protection
Weight	6.75 lbs.
Dimensions (W x H x D)	12.20" x 8.66" x 3.93"

Warranty

3-year Optoma Express Service, 1-year on lamp

What's in the Box

EH465 projector, AC power cord, remote control, USB Wi-Fi adapter, carrying case, batteries for remote, multilingual CD-ROM user's manual, quick start card, and warranty card

Optional Accessories

Universal ceiling mount, DLP@Link™ 3D glasses, lamp, remote, WUSB (Wi-Fi adapter replacement)

Accessory Part Numbers

Lamp: BL-FP285A
Wi-Fi adapter: WUSB
Remote: BR-5011L
DLP@ Link™ 3D glasses: ZD302
Universal ceiling mount: OCM818W-RU
Universal ceiling mount: BM-5001U
Universal ceiling mount (with extensional pole): OCM815W
Single-Cat6 HDBaseT kit: EVBM-M110
Carrying case: SP.8VH03GC01

UPC 796435 44 105 0

www.OptomaUSA.com



Copyright © 2018 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time. 02282018